

# Solder Tube Preforms

## Benefits

- Precise solder volume
- Flux content options  
(0.5–2.0% of weight)
- Visual reflow indicators
  - Thermochromic flux dye
  - Bi-alloy tube



Contact our engineers: [askus@indium.com](mailto:askus@indium.com)

Learn more: [www.indium.com](http://www.indium.com)


*All of Indium Corporation's solder paste and preform manufacturing facilities are IATF 16949:2016 certified. Indium Corporation is an ISO 9001:2015 registered company.*

# Solder Tube Preforms



## Standard Tube Dimensions

Dimension	Minimum	Maximum
OD	0.070" (1.778mm)	1.051" (26.695mm)
ID	0.050" (1.270mm)	1.024" (26.009mm)
Height	0.055" (1.397mm)	0.394" (10.007mm)
Wall	0.010" (0.254mm)	0.014" (0.343mm)

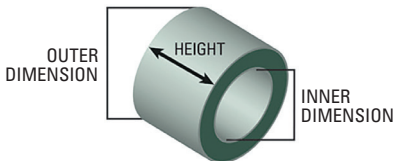

Contact our engineers: [askus@indium.com](mailto:askus@indium.com)

Learn more: [www.indium.com](http://www.indium.com)

*All of Indium Corporation's solder paste and preform manufacturing facilities are IATF 16949:2016 certified. Indium Corporation is an ISO 9001:2015 registered company.*